


VACUUM AND GAS FLUSHING SEALERS




Available Design and Models

- Nozzle Type Electric Motor Driven Models
- Nozzle Type Air Driven Models
- Nozzle Type Models with Stand
- Nozzle Type Air Driven Vertical Models
- Single Chamber Type Models
- Double Chamber Type Models
- Models For Special Applications

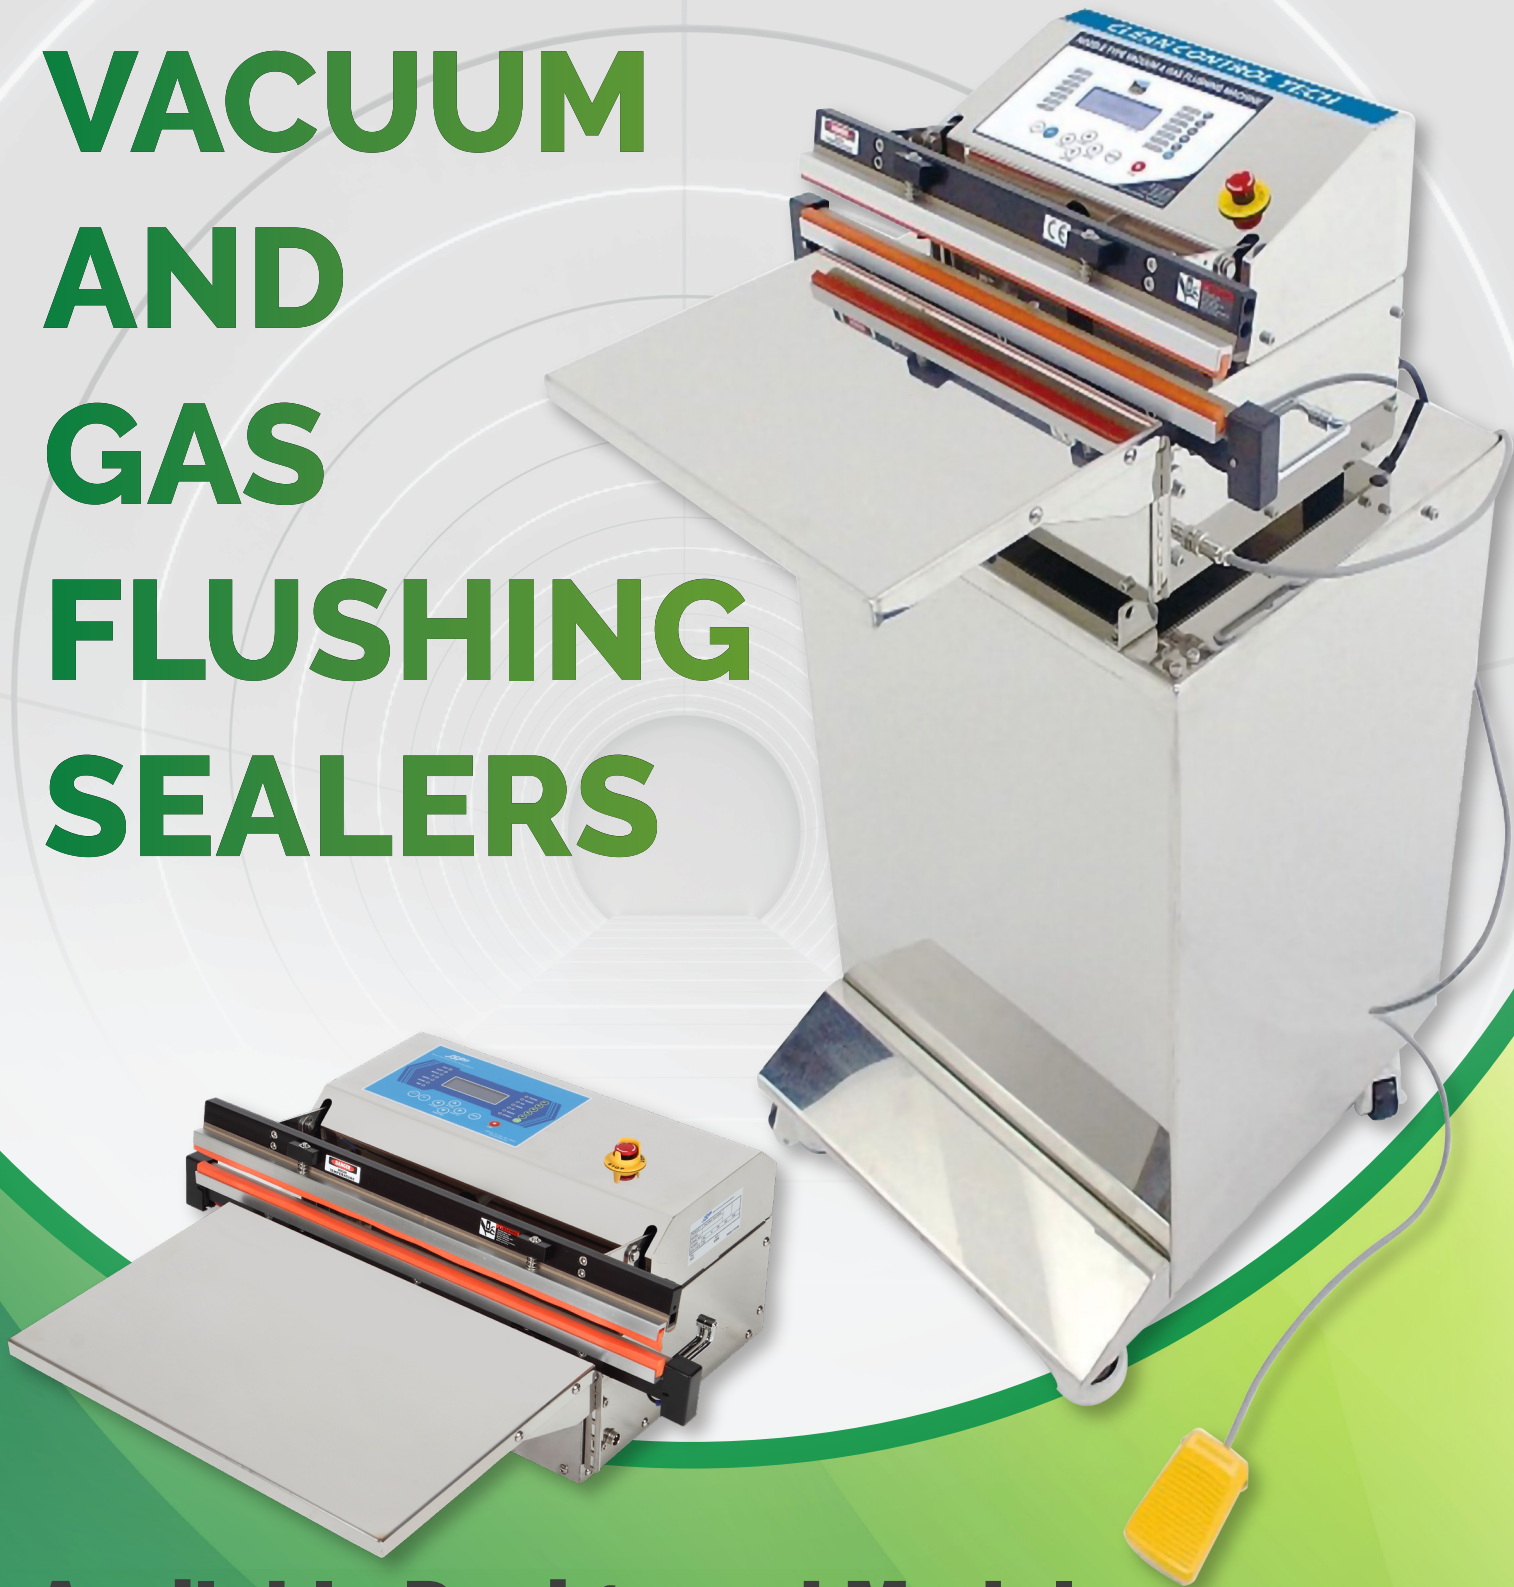

DOU YEE
ENTERPRISES

Nozzle Type Electric Motor Driven Models

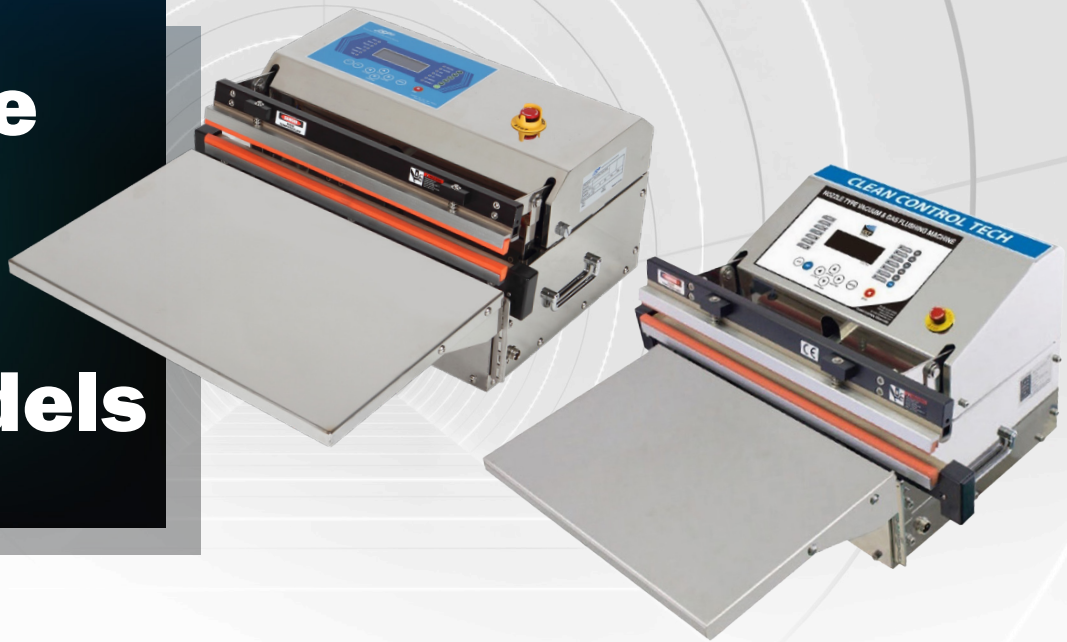


GAS Additional Options




Double Heat Wires




Single / Double Heat Wires Selector Switch



Long Nozzle



Nozzle Air Cleaning



Safety Hands Operation without Footswitch

Features

- NO Compressed Air required to operate
- Compact & Simple Design
- Portable and able to operate in any area with electrical supply
- High Grade Stainless Steel Body & Tray
- Gas Flushing Function Available
- Pre-Set Memory Functions
- Stable DC24V Operation
- In case of malfunction, error code will be shown on the Display Panel

Specification

Model	CT-350/450/600M
Max Seal Length	350MM/450MM/600MM
Seal Width	5MM/10MM (Standard)
Heat Wires	Single/Double
Emergency Stop Button	Available
Gas Flush Function	Available
Work Tray	Available & Height Adjustable
Electrical Requirements	100~230VAC, 1PH, 50/60Hz
Weight	~25/27/29KG
Max. Vacuum Rate	~ 80 kPa

Nozzle Type Air Driven Models / Models with Stand

Features

- Additional Options available in the Electric Motor Driven Models are applicable to these models
- Compact & Simple Design
- Various Designs to cater for a wide range of Applications
- High Grade Stainless Steel Body & Tray
- Gas Flushing Function Available
- Pre-Set Memory Functions
- Stable DC24V Operation
- In case of malfunction, error code will be shown on the Display Panel

Specification


Model	CT-450/600/800E
Max Seal Length	450MM/600MM/800MM (Other Lengths can be customized)
Seal Width	5MM/10MM (Standard)
Heat Wires	Single/Double
Required Air Pressure	~5-7kg/cm²
Gas Flush Function	Available
Work Tray	Available & Height Adjustable
Electrical Requirements	100~230VAC, 1PH, 50/60Hz
Weight	~32/35/38KG
Max. Vacuum Rate	~ 80 kPa



Basic Model with or
without Stand is available





Basic Model with Height
Adjustable Work Tray for
packing Bulky Item

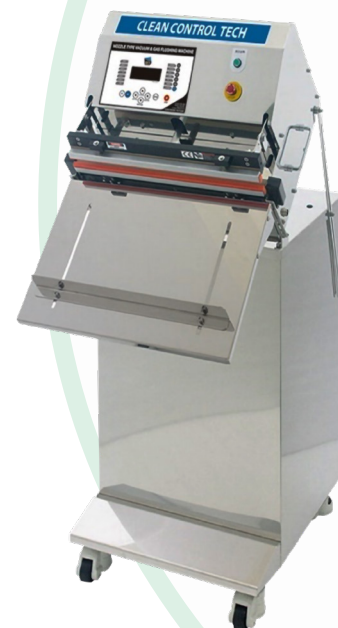

Basic Model with Angle
Adjustable Stand for packing
Liquid / Powder

Nozzle Type Air Driven Vertical Models

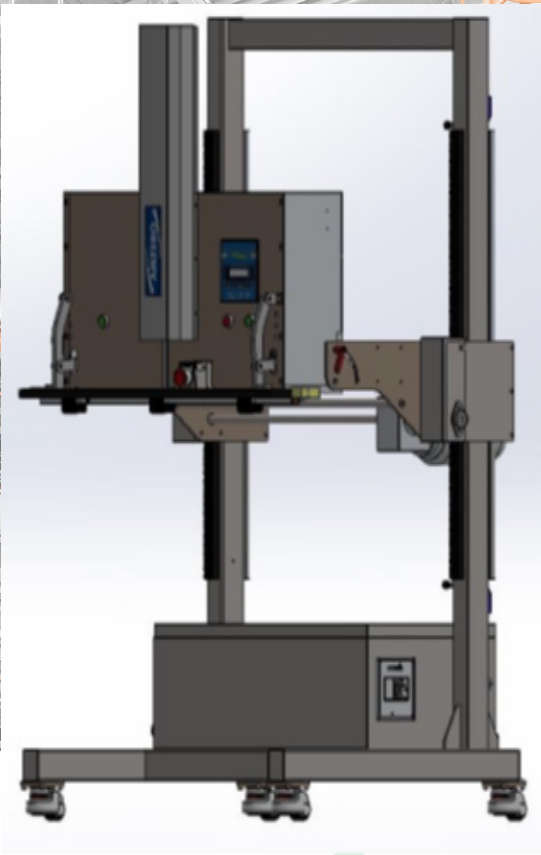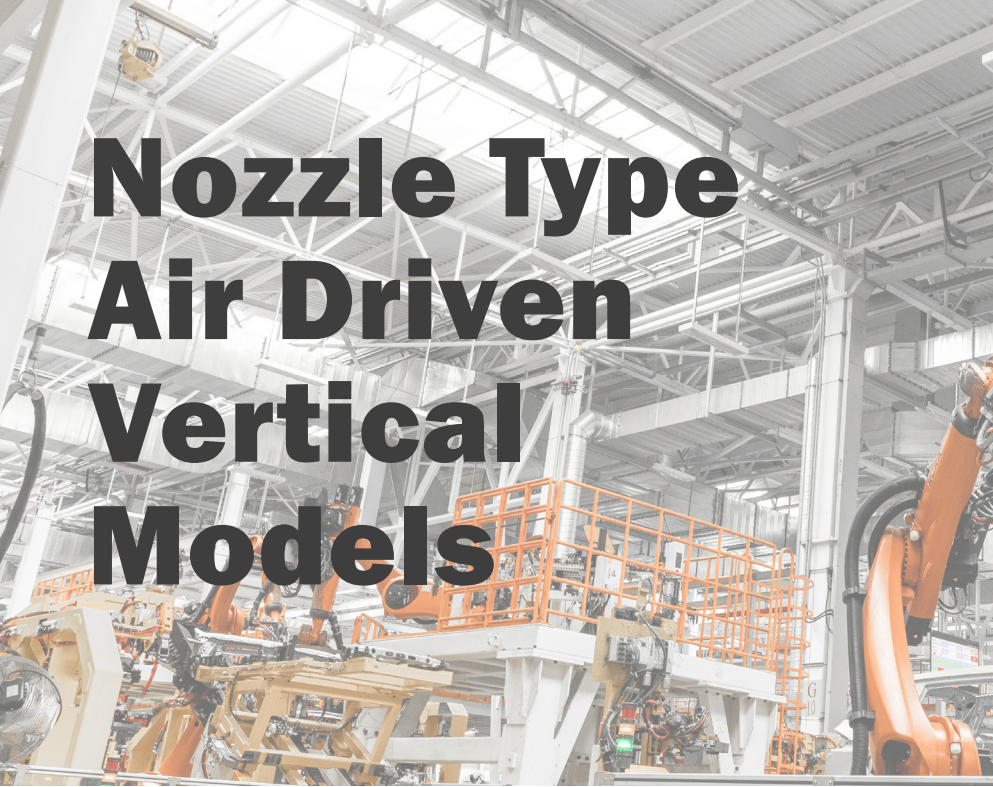

Specification

Model	AZ-600/800/1000/1200
Max Seal Length	600MM/800MM/1000MM/1200MM
Seal Width	5MM/10MM (Standard)
Heat Wires	Single/Double
Required Air Pressure	~5-7kg/cm²
Emergency Stop Button	Optional
Gas Flush Function	Optional
Work Tray	Available & Height Adjustable
Electrical Requirements	380VAC, 3PH, 50/60Hz (Other Voltage & Frequency Available)
Weight	~80/35/38KG
Max. Vacuum Rate	~ 75 - 80 kPa

Features

- Able to operate in both Horizontal & Vertical Positions
- Working Height to Ground Level is adjustable by Electric Motor
- Various Designs to cater for a wide range of Applications
- Long Nozzle for easy vacuum sealing of bulky items
- Products can be vacuum sealed on trolley to provide safety and convenience to user and product itself
- High Grade Stainless Steel Body & Structure
- Gas Flushing Function Available
- Pre-Set Memory Functions

Single & Double Chamber Models



Features

- NO Compressed Air required to operate
- Product is visible during the vacuum sealing process via the acrylic chamber cover
- High Grade Stainless Steel Body
- Easy to Operate and Consistent in Vacuum & Sealing Quality
- Pre-Set Memory Functions
- Digital Control Panel
- Suitable for Food Packing, Meat Packaging, Lab & Industrial Products Packaging

Specification

CODE NO.	Q803-4	Q803-5	Q803-6	Q803-7	Q803-8	Q803-9
MODEL NO.	CCT-400C	CCT-500C	CCT-600C	CCT-700D	CCT-700E	CCT-900C
TYPE	Table	Stand	Stand	Stand	Stand	Stand
VACUUM PUMP(L)	400L	600L	600L	700L	800L	900L
VACUUM CYCLE	1~2 time/ min (Can be changed by object for packing)					
CONTROL TYPE	Digital Type					
MATERIAL	Body : Stainless steel (SUS304) / Sealing bar : Aluminium anodizing					
SEALING SIZE(MM)	(400x2.5)mmx2	(500x3.2)mmx2	(600x3.2)mmx2	(600x3.2)mmx2/2ea	(600x3.2)mmx2/2ea	(900x10)mm x2 of control box
POWER(Kw)	2Kw	4.5Kw	4.5Kw	4.5Kw	4.5Kw	4.5Kw
INNER SIZE(MM) [WDXH]	430x455x160	510x620x170	620x600x170	620x700x170	620x700x170	940x450x155
OUTER SIZE(MM) [WDXH]	480x550x430	570x723x970	680x703x970	680x800x970	680x800x970	1,000x550x970
VOLTAGE	220v 60Hz Single Phase					
WEIGHT(KG)	49kg	120kg	130kg	145kg	145kg	145kg




Double Chamber Models




Features

- Robust Design and Easy Installation
- User Friendly Operation with Micro-Processor Fully Automatic Control System
- High Grade Stainless Steel Body
- Easy to Operate and Consistent in Vacuum & Sealing Quality
- Pre-Set Memory Functions
- Digital Control Panel
- Bigger Chamber Size compared to Single Chamber Models
- Higher Outputs compared to Single Chamber Models

Specification

Model	CCT-S750	CCT-Q750	CCT-Q850
			
Power	380V(220V)/50~60Hz-3 Phase		
Vacuum cycle	2~3 times/min.		
Control panel	Digital type		
Opening & closing of chamber	Spring type		
Available sealing size (L x W)mm			
	[750x10]x4ea	[750x10]x4ea	[850x10]x4ea
Power	5.5KW	7.5KW	
Material of machine	Frame: SUS304 Chamber: Cast Aluminium		Frame: SUS304 Chamber: SUS304
	2,000L (BUSCH Pump)		3,200L (BUSCH Pump)
Chamber dimension (L x W x H)mm (Inner size)	810 690x170	850x800x200	950x800x200
Dimension (L x W x H)mm	1,700x1,000x1,050	1,700x1,025x1,018	1,900x1,025x1,018
Weight	330Kg	370Kg	450Kg

MODELS For Special Applications

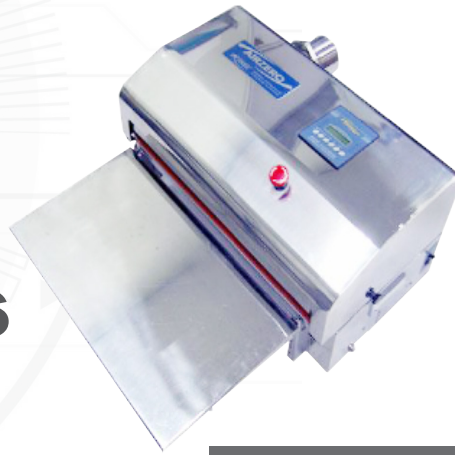

Vacuum Sealer with Exhaust
Outlet for Cleanroom Operation



Vertical / Horizontal Vacuum
Sealer for Packing Battery
Materials / Medical Products



Heavy Duty Work Tray
for Vacuum Sealing
heavy items



Height Adjustable
Work Tray for Vacuum
Sealing bulky items



Angle Adjustable & Extended
Work Tray for vacuum sealing
wet/powder/long items



More than **45** offices across
North America, Europe and Asia Pacific

Manufacturing Plants

Singapore . Malaysia . China . France . Poland



HEAD OFFICE

2304 Bedok Reservoir Road,
#05-00 Dou Yee Building,
Singapore 479223

Tel: (65) 6444 2678
Website: www.douyee.com
Email: s2_marketing@douyee.com.sg



Branches Contacts